

753
SKID-STEER LOADER



Left Side Standard Instrument Panel



Right Side Standard Instrument Panel



Optional Deluxe Instrument Panel

One Tough Animal

Bobcat® 753 Skid-Steer Loader

SPECIFICATIONS

Performance

Rated Operating Capacity¹
ROC with optional counterweight
Tipping Load
Hydraulic Pump Capacity
Travel Speed
Operating Weight

753

1300 lb. (590 kg)
1400 lb. (635 kg)
2600 lb. (1179 kg)
15.9 GPM (60.1 L/min)
6.6 MPH (10.6 km/hr.)
4740 lb. (2150 kg)

Dimensions

Length (with bucket)
Width (with bucket)
Height
Height to Bucket Pin

120.5 in. (3059 mm)
55.0 in. (1398 mm)
77.0 in. (1956 mm)
109.1 in. (2771 mm)

Engine

Make/Model
Fuel/Cooling
Cylinders
SAE NET HP/Displacement
Fuel Tank Capacity

Kubota/V2203-EB
Diesel/Liquid
4
43.5 /134 in.³ (2.2 L)
14 gal. (53 L)

Operation

Steering and Drive

Forward, reverse, travel speed and steering controlled by two hand levers.

Hydraulics

Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.

Transmission

Hydrostatic, four-wheel drive.

Standard Features

Adjustable Cushion Seat
Automatically Activated
Glow Plugs
Bobcat Interlock Control
System (BICS™)
Bob-Tach™
Deluxe Cab
Dual Path Cooling System
Engine/Hydraulic
Shutdown
Front Auxiliary
Hydraulics

Front & Rear Lights
Lift Arm Support
Meters/Gauges/
Warning Lights
Parking Brake
Seat Bar
Seat Belt
Spark Arrestor Muffler
10-16.5 Standard
Duty Tires

Options/Accessories

Advanced Control
System (ACS)
Attachment Control Kit
Backup Alarm
Bobcat Heavy-Duty Tires
Bobcat Heavy-Duty
Offset Tires
Bobcat Poly-Fill Tires
Bobcat Severe-Duty Tires
Bobcat Super Float Tires
Catalytic Purifier
Counterweight Kit
Deluxe Cab w/Heater
Deluxe Instrument Panel
Flasher/Strobe Lights
Horn

Hydraulic Bucket
Positioning²
Keyless Start System
Power Bob-Tach™
Rear Auxiliary
Hydraulics
Rear Stabilizer
Service Safety Training Kit
Side Windows
Skid-Steer Loader
Operator Training Kit
Sound Package
Special Applications Kit³
Suspension Seat (Vinyl or
Cloth Cover)
Water Kit

The Attractively-Priced Bobcat 753 Skid-Steer Loader

The 753 is a smart way to move into the popular Bobcat line of skid-steer loaders. The machine offers top value for your money. It has a turning radius of 6 feet and a rated operating capacity of 1300 pounds, along with features such as heavy-duty drive chains that never need adjustment, removable axle hubs for quick, easy servicing and a dual-path cooling system that cools with debris-free air. The 753 also works with all the same attachments as the other 700 models, and sells for a very attractive price.

The Multi-Purpose Bobcat 753 Skid-Steer Loader

A hard-working skid-steer loader, the 753 is loaded with time-saving, money-saving features. Here are just a few:

- Great balance of power and maneuverability.
- Choice of seven bucket styles and more than 30 other attachments.
- Bobcat Interlock Control System (BICS)™ is standard.
- Operator-friendly cab.

Greater Comfort

The cab is designed with the operator in mind, for optimum comfort and functionality. And with a wider opening, it's easy to enter and exit.

The seat bar pivots from the rear, providing secondary restraint protection as well as a comfortable armrest for operators of all sizes. Plus, the worklight design doubles the amount of illumination to the work area for better operation in low light.

The 753 also features an easy-to-read, highly functional instrument panel, along with a number of improved comfort options.

1300 LB. Rated Operating Capacity; 1400 lb. with optional counterweight kit

109.1 IN. Lift Height

43.5 HP Liquid-Cooled Diesel Engine

Optional Deluxe Instrument Package includes:

- Multi-language capability
- System diagnostic capability
- All gauges read in metric or English units
- Keyless start security
- Job clock
- Real-time clock
- Help screens

NOTE — Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat loaders may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

¹ Operating capacity rated with standard digging bucket according to SAE standard J818 - OPERATING CAPACITY TO EQUAL NO MORE THAN ONE-HALF THE TIPPING LOAD.

² Bucket positioning helps operator keep the same tilt of the load during lifting.



³ Includes Lexan front door, top and rear windows.

⁴ Special application kit (see #3) must be used.

A - 10-16.5 Tires - 60.3 in. (1524 mm) or 54 in. (1372 mm) with inset rims. 31.5 x 13-16.5 - 60 in. (1524 mm)

B - 10-16.5 Tires - 50.3 in. (1278 mm) or 44 in. (1118 mm) with inset rims. 31.5 x 13-16.5 - 46.3 in. (1176 mm)

C - 54 in. Bucket Width - 55.0 in. (1398 mm) 62 in. Bucket Width - 62.0 in. (1575 mm)

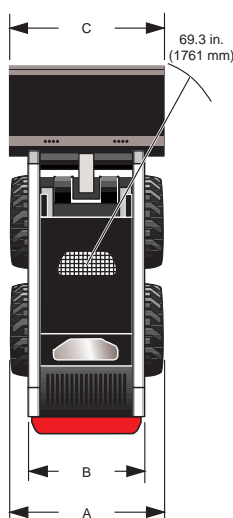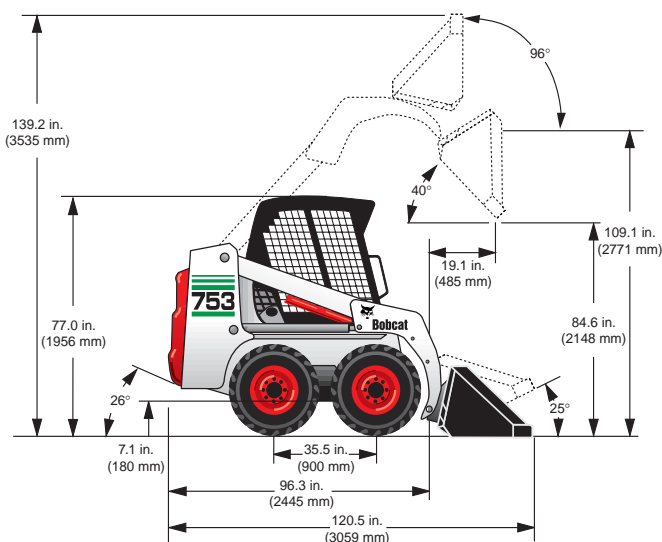

Bobcat®

B-1722

Bobcat Company
P.O. Box 6000 • West Fargo, ND 58078
www.bobcat.com

Printed in U.S.A.

An **IR** Ingersoll Rand business

KnB-30M-0603-#640444-F

Bobcat Attachments for this model:

Angle Broom*
Auger
Backhoe
Brushcat™
Rotary Cutter
Buckets
Chipper*
Combination
Bucket
Concrete Mixer*
Cutter Crusher
Digger
Dozer Blade*
Dumping Hopper
Ejector Bucket
Farm Grapple
(for use with utility
forks or bucket)
Front Scarifier
Grader*
Hydraulic Breaker†
Hydraulic
Pallet Fork
Industrial Grapple
Landplane
Landscape Rake
Pallet Fork
Planer*
Rear Stabilizer
Scraper
Snow Blade
Snowblower*
Sod Layer*
Soil Conditioner*
Spreader
Sweeper
Three Point Hitch
Tiller
Tilt-Tatch
Tracks
Trench Compactor
Trencher
Utility Fork
Vibratory Roller
Whisker Push
Broom

*Attachment Control
Kit required.